







2013 Steel Framed Series Steel Flush Panel Bypass Doors



Product Description

- Lightweight 3mm panel insert
- One piece top track for fast, easy installation
- Adjustable for out-of-square openings
- All connectors factory installed
- Includes all hardware and fasteners
- Factory finished, ready-to-install



Steel Framed Finishes

 SATIN GOLD (SG)	 ARCTIC SILVER (AS)
 BRIGHT WHITE (BW)	 MATT BLACK (MB)
 BRIGHT GOLD (BG)	 VANILLA (VA)
 ARCHITECTURAL BROWN (AB)	

Flush Panel Finishes

 WHITE 1/8" (3mm)	 ALMOND 1/8" (3mm)
 WHITWOOD 1/8" (3mm)	 OAK 1/8" (3mm)

Stile Profile

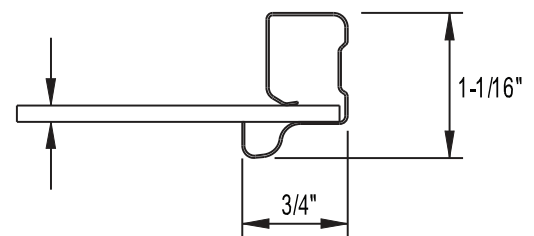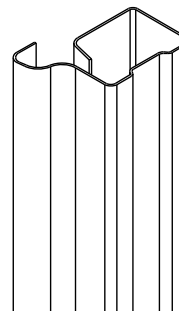

Featuring



2013 Steel Framed Series Steel Flush Panel Bypass Doors

Sliding closet doors shall be **2013 Steel Framed Series** consisting of steel framed door panels that are top rolling in a steel one piece top track and bottom guided in a steel bottom track.

The steel frame shall consist of stiles (vertical member) with an integral pull and rails (horizontal member).

The stiles and rails shall be joined at each corner by unhandled connectors that snap into position, are positively fastened, but can be removed for changing of inserts. Top connectors shall have either ball bearing rollers or solid acetal plain bearing wheels. Bottom connectors shall have a floating guide that locks into the bottom track. Vertical adjustment is 1" (25mm) on the bottom and 1-1/4" (32mm) on the top.

The top track shall be one piece and of pre-finished steel. The fascia finish shall match that of the top track. The bottom track shall be pre-finished steel and not exceed 5/16" (8mm) from the floor. Both top track and bottom track finishes shall match the stile and rail.

The stile, rail, top track and bottom track shall have a baked enamel paint finish (satin gold, bright gold, bright white, matt black, arctic silver, architectural brown, or vanilla). The connectors shall be plated.

The top track shall be jump proof when doors are engaged in the vertical position. The doors are removable by tilting at a 15° angle.

Insert thickness: 1/8" to 5/32" (3mm to 4mm)


Maximum single door size: 48" wide x 96" high (1219mm x 2438mm)

Maximum single door weight: 42 lbs. (19kgs)

Finished Door Opening Heights: Standard 80 1/2" (door range: 79 3/4" to 81"), Standard 96" (door range: 95 1/2" to 96 3/4")

Finished Door Opening Widths: Standard widths of 48", 60", 72", 84", 96", 108", 120", 144", 192". Custom sizes available up to 192"w x 96"h

Cross Sectional

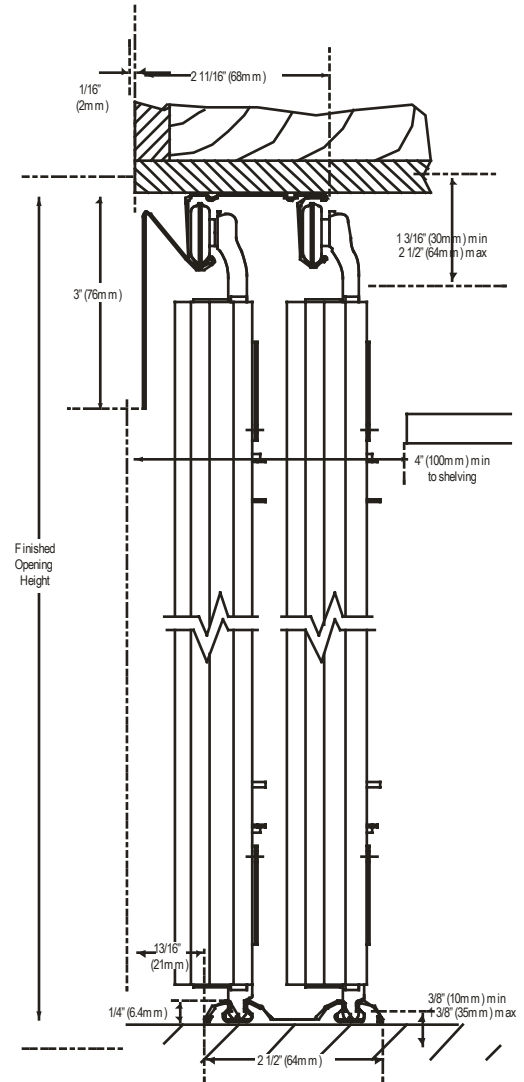

Featuring

