

INTERIOR DOOR SYSTEMS

7003 Aluminum Framed Series

Aluminum Framed Mirror or Glass Bypass Doors



Aluminum Framed Finishes



SATIN BRASS
(B1)



BRIGHT BRASS
(B2)



SATIN CHROME
(C1)



BRIGHT CHROME
(C2)

Glass Options



CLEAR MIRROR
Safety-backed
3mm



SMOKED MIRROR
Safety-backed
3mm




BRONZE MIRROR
Safety-backed
3mm



**WHITE BACK
PAINTED GLASS**
Safety-backed
3mm



**TRANSLUCENT
WHITE LAMINATED
GLASS**
6mm





**BLACK BACK
PAINTED GLASS**
Safety-backed
3mm



**RED BACK
PAINTED GLASS**
Safety-backed
3mm

Stile Profile

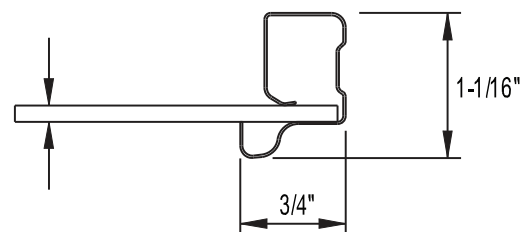

Product Description

- Bottom roll with top guide "E" channel
- Anti-jump bottom rollers
- Standard sizes fit 4', 5', 6' widths and finished opening heights of 79-3/4" - 80-3/4" and 95-1/2" - 96-1/2" (+/- 1/4" adjustment)
- Factory finished, ready-to-install
- Custom sizes made to order

Featuring



7003 Aluminum Framed Series Aluminum Framed Mirror or Glass Bypass Doors

Sliding closet doors shall use **7003 Aluminum Framed Series** hardware consisting of aluminum framed door panels and shall be supported by adjustable bottom rollers that travel in an aluminum bottom track and top guides that travel in an aluminum top track.

The aluminum frame shall consist of stiles (vertical member) with an integral pull and rails (horizontal member).

The stiles and rails shall be joined at each corner by unhandled connectors that snap into position, are positively fastened, but can be removed for changing of inserts. Bottom connectors shall have either ball bearing rollers or solid acetal plain bearing wheels both with an integral anti-jump housing. Top connectors shall have a solid plastic guide permanently attached to the connector housing which provides a snug fit with the top track. The plastic guide will adjust to five different positions to ensure an optimum fit. Vertical adjustment is 1-1/8" (29mm) on the bottom and 1-1/4" (32mm) on the top.

The top track shall be one piece and of pre-finished aluminum. The bottom track shall be pre-finished aluminum and not exceed 5/16" (8mm) from the floor. Both top track and bottom track finishes shall match the stile and rail.

The stile, rail, top track and bottom track shall have a baked aluminum finish (satin brass, bright brass, satin chrome or bright chrome). The connectors shall be plated.

Insert thickness: 1/8" to 5/32" (3mm to 4mm)

Maximum single door size: 48" wide x 96" high (1219mm x 2438mm)


Maximum single door weight: 85 lbs. (38kg)

Finished Door Opening Heights: Standard 80 1/2" (door range: 79 3/4" to 80 3/4"), standard 96" (door range: 95 1/2" to 96 1/2")

Finished Door Opening Widths: Standard widths of 48", 60", 72", 84", 96", 108", 120", 144", 192". Custom sizes available up to 192"w x 96"h

All JJ® mirror products use safety backed mirror. The mirror conforms to CGSB 12.5-M86 Type 3C (Canada) and ANSI Z97.1-1984 (US)

Cross Sectional

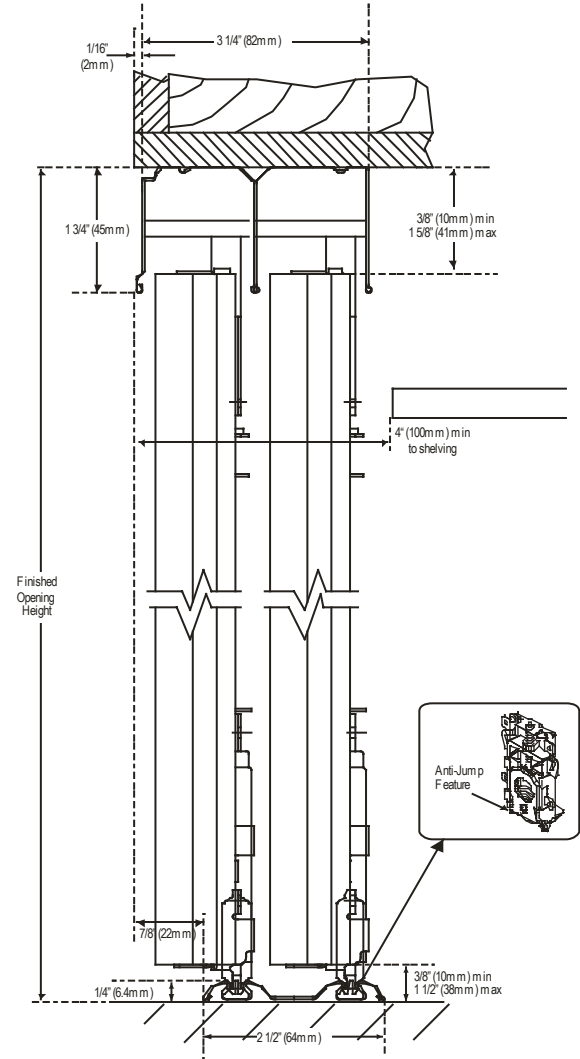

Featuring

