

INTERIOR DOOR SYSTEMS

7033 Aluminum Polished Edge Frameless Series

Aluminum Polished Edge Frameless Mirror Bypass Doors



Aluminum Frameless Finishes



SATIN BRASS
(B1)



BRIGHT BRASS
(B2)



SATIN CHROME
(C1)



BRIGHT CHROME
(C2)

Glass Options



CLEAR MIRROR
Safety-backed
3mm




SMOKED MIRROR
Safety-backed
3mm




BRONZE MIRROR
Safety-backed
3mm

Stile Profile



Product Description

- Bottom roll with top guide "E" channel
- Anti-jump bottom rollers
- Edgeguard frame and mirror with polished edges
- Standard sizes fit 4', 5', 6' widths and finished opening heights of 79-3/4" - 80-3/4" and 95-3/4" - 96-3/4" (+/- 1/4" adjustment)
- Factory finished, ready-to-install
- Custom sizes made to order

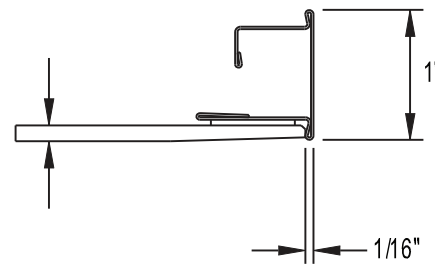

Featuring



7033 Aluminum Polished Edge Frameless Series Aluminum Polished Edge Frameless Mirror Bypass Doors

Frameless sliding closet doors shall use **7033 Aluminum Frameless Series** hardware consisting of aluminum framed door panels and shall be supported by adjustable bottom rollers that travel in an aluminum bottom track and spring loaded top guides that travel in an aluminum one piece top track.

The aluminum frame shall consist of stiles (vertical member bonded to the back of the penciled edge of the mirror). A protective edge is an integral part of the stile that protects the edge of the mirror without taking away from the aesthetics of the frameless look. The rails (horizontal member) shall provide a mechanical fitting at the top and bottom.

The stiles and rails shall be joined at each corner by unhandled connectors that snap into position and are positively fastened. Bottom connectors shall have either ball bearing rollers or solid acetal plain bearing wheels, both with an integral floating anti-jump housing. Top connectors shall have a solid plastic guide permanently attached to the connector housing which provides a snug fit with the top track. The plastic guide will adjust to two different positions to ensure an optimum fit. The vertical adjustment is 1-1/8" (29mm) on the bottom and 1-1/4" (32mm) on the top.

The top track shall be one piece and of pre-finished aluminum. The bottom track shall be pre-finished aluminum and not exceed 5/16" (8mm) from the floor. Both top track and bottom track finishes shall match the stile and rail.

The stile, rail, top track and bottom track shall have a baked aluminum finish (satin brass, bright brass, satin chrome or bright chrome). The connectors shall be plated.

Insert thickness: 1/8" (3mm)

Maximum single door size: 48" wide x 96" high (1218mm x 2438mm)


Maximum single door weight: 85 lbs. (38kg)

Finished Door Opening Heights: Standard 80 1/2" (door range: 79 3/4" to 80 3/4"), standard 96" (door range: 95 1/2" to 96 1/2")

Finished Door Opening Widths: Standard widths of 48", 60", 72", 84", 96", 108", 120", 144", 192". Custom sizes available up to 192"w x 96"h

All JJ® mirror products use safety backed mirror. The mirror conforms to CGSB 12.5-M86 Type 3C (Canada) and ANSI Z97.1-1984 (US)

Cross Sectional

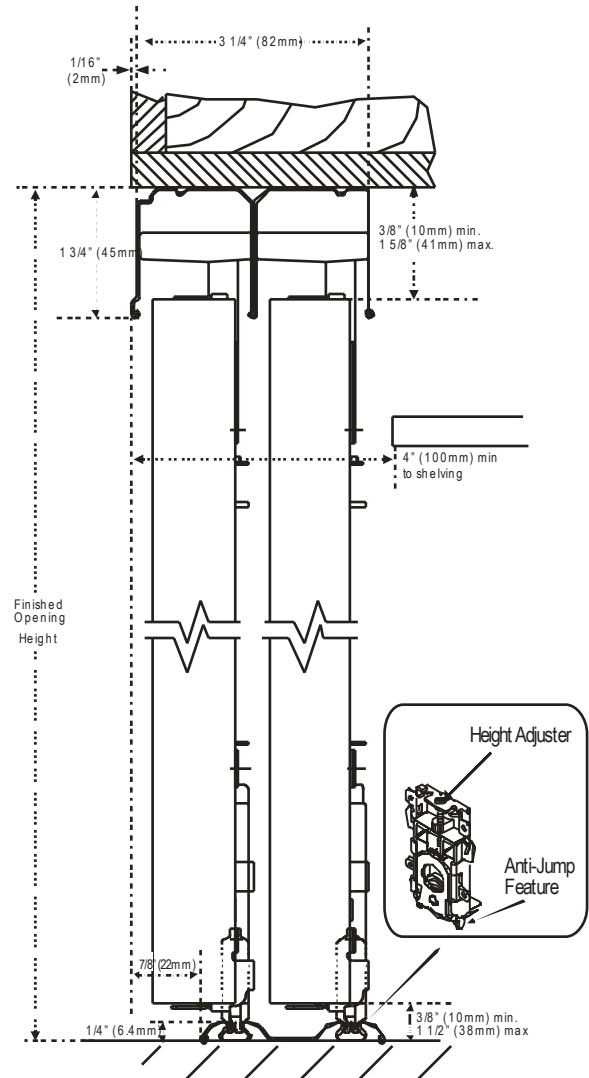

Featuring

