

INTERIOR DOOR SYSTEMS

7041 Extruded Aluminum Series



Aluminum Wall Mounted Sliding Mirror or Glass Door





Extruded Aluminum Frame Finish



Glass Options

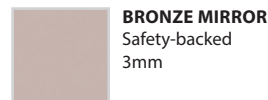

Stile Profile

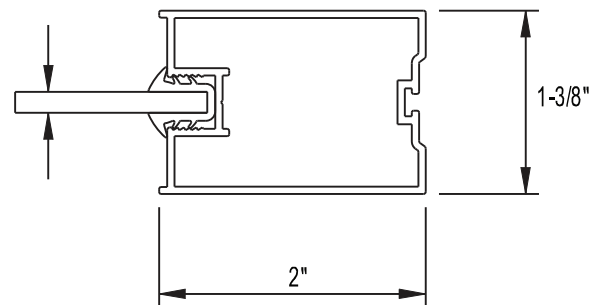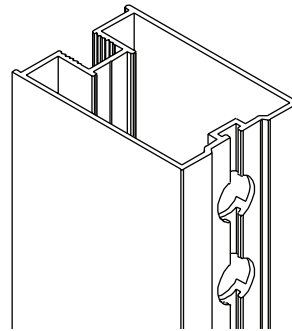

Product Description

- 2" x 1-3/8" Extruded Aluminum Door frame
- Top roll system
- No bottom track
- Single or double-sided 3mm mirror glass, back-painted glass or single 6mm laminated glass inserts available (1 Lite translucent white laminated glass shown)
- Factory finished, ready-to-install
- Custom sizes made to order

Featuring



7041 Extruded Aluminum Series Aluminum Wall Mounted Sliding Mirror or Glass Door

Framed sliding door shall use **7041 Extruded Aluminum Series** hardware consisting of a 2" x 1-3/8" extruded aluminum framed door and shall be supported by adjustable top rollers that travel in an aluminum top track and a floor mounted bottom guide.

The aluminum frame shall consist of stiles (vertical member) and rails (horizontal member).

The stiles and rails are pressed on and fit snugly with the use of a gasket that surrounds the insert. The stiles and rails shall be fastened at each corner by screws that join the stiles and rails. Top rollers shall have ball bearing wheels. The bottom guide shall be either fastened to the wall of the opening or to the floor and prevents the door from swaying to and fro during operation.

The top track shall be one piece of anodized aluminum and attach to an aluminum L bracket securely fastened to the wall above the opening. A snap on aluminum fascia mounts to the front of the top track.

The stiles, rails, L Bracket, top track and fascia shall have an anodized aluminum finish (A2). An optional handle and rubber bumper system provide resistance to the door sliding when engaged with the floor.

The 7041 sliding door allows complete access to the closet or storage access.

If required, two aluminum end caps fastened to each end of the top track are used to hide the top hangers.

Insert thickness: 1/8" or 15/64" (3mm or 6 mm)

Maximum single door size: 42" wide x 108" high (1067mm x 2743mm).


Maximum single door weight: 100 lbs.

Finished Door Opening Heights: = Finished opening height + 4"

Finished Door Opening Widths: = Finished opening width + 4"

JJ® frosted glass products are tempered and conform to local standards. In Canada, tempered or laminated safety-glass conform to CGSB Can1-12.1-M90. In the United States, tempered or laminated glass conform to ANSI Z97.1-1984 standards.

Cross Sectional

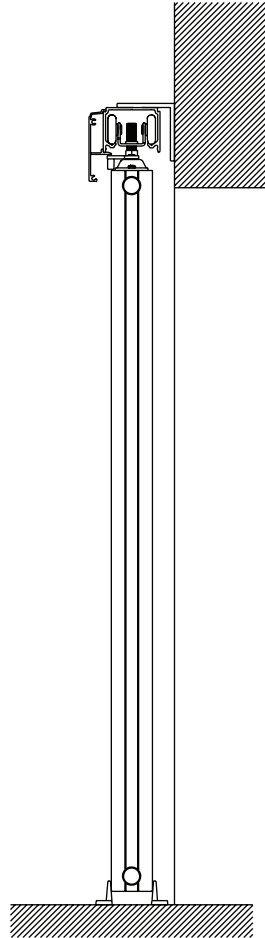

Featuring



ARCHITECTURAL SHEET