

# INTERIOR DOOR SYSTEMS

## 2401 Euro Wood Series

### Euro Wood Framed 3 Lite Bypass Doors



Cherry

#### Euro Wood Frame Finishes



**ESPRESSO**  
(EF)




**CHERRY**  
(CF)



**WHITE**  
(WF)

#### Glass Option



**TEMPERED FROSTED GLASS**  
STANDARD FOR EURO DOORS  
4mm



White

#### Product Description

- 3 Lite 2 panel system
- Top roll system with no bottom track
- Laminated frame has "wood" look (Cherry, White, or Espresso)
- Matching fascia
- Adjustable top rollers and bottom floor guide
- Standard sizes fit 4', 5', 6' widths and finished opening heights of 80-1/2" (+/- 1/8" adjustment)
- Factory finished, ready-to-install



Espresso

Featuring



## 2401 Euro Wood Series Euro Wood Framed 3 Lite Bypass Doors

Sliding closet doors shall be **2401 Euro Wood Series** consisting of laminated wood substrate framed door panels that are top rolling in a one piece top track and adjustable bottom floor guide.

The frame shall consist of stiles (vertical member) and rails (horizontal member).

The stiles and rails shall be joined at each corner by dowels and glued. Top rollers shall have solid acetal plain bearing wheels.

The top track shall be one piece and of anodized aluminum. The fascia finish shall match that of the stile and rails. The bottom guide shall be pre-finished steel/plastic and not exceed 7/8" (2mm) from the floor.

The stile, rail and fascia shall have a laminated finish (Espresso, White or Cherry).

The top track shall be jump proof when doors are engaged in the vertical position. The doors are removable by tilting at a 15° angle.

**Insert thickness:** 5/32" (4mm)

**Maximum single door size:** 36" wide x 80-1/2" high (914mm x 2045mm)


**Maximum single door weight:** 60 lbs. (27kg)

**Finished Door Opening Heights:** Standard 80 1/2" (door range: 80 1/8" to 81")

**Finished Door Opening Widths:** Standard widths of 48", 60", 72"

**JJ®** frosted glass products are tempered and conform to local standards. In Canada, tempered or laminated safety-glass conform to CGSB Can1-12.1-M90. In the United States, tempered or laminated glass conform to ANSI Z97.1-1984 standards.

### Cross Sectional

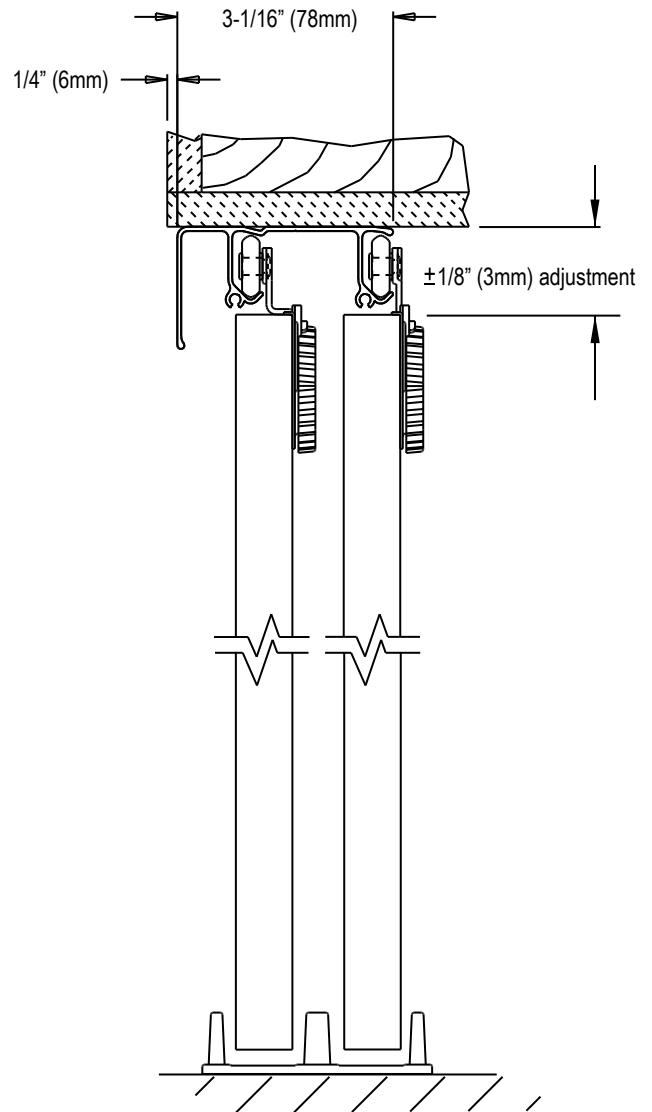

Featuring

